

# Aqua-Pure®

Spec # \_\_\_\_\_

Quantity \_\_\_\_\_

## Models:

**AP430SS**

**Stainless Steel Water Filter**

## Applications:

- Scale

## At a Glance:

- Unrestricted flow designed with 3/4" inlet/outlet connections
- Ideal for any size home and light commercial applications

Now Rated  
for up to  
**10 GPM**  
Flow Rate



AP430SS


## Product Benefits:

- 3/4" inlet and outlet connections for easy installation and high flow rates
- Designed for scale and corrosion inhibition to help extend life of hot water systems, pipes and downstream plumbing fixtures
- Designed with translucent dispenser cartridge to allow for convenient detection of remaining scale reduction level
- Multi-application design effective on all types of hot water systems - boilers, tank-less, and tank-type (gas or electric)
- Manufactured from FDA CFR-21 compliant materials

## Product Specifications:

Model No. (Part No.)	Inlet/ Outlet Size	Dimensions		Approx. Weight	Flow Rate	Clean Pressure Drop	Max. Water Temp.	Max. Water Pressure	Std. Repl. Ctg. No.	Repl. Cart. Qty.	Degree of Filtration
		Height	Diameter								
AP430SS (AP430-10)	3/4" NPT	10-1/4" (26.0)	2-3/4" (7.0 cm)	2.3 lbs. (1.0 kg)	10 gpm (37.9 lpm)	N/A	100°F (37.8°C)	125 psi (862 kPa)	AP431	1	N/A

# Aqua-Pure®

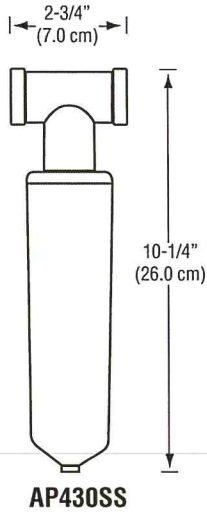

Spec # \_\_\_\_\_

Quantity \_\_\_\_\_

Model Number \_\_\_\_\_


Part Number \_\_\_\_\_

## Physical Specifications:

- 3/4" NPT inlet and outlet ports
- System is a single vessel design
- System is manufactured from FDA CFR-21 compliant materials
- System has a maximum operating pressure of 125 psi (862 kPa) and operating temperature of 100°F (37.8°C)
- System to be installed on cold water line feeding the water heater

## Easy Installation:

**CAUTION:** Diagram shown is for reference purposes only. Read installation and operation manual prior to installing the unit.

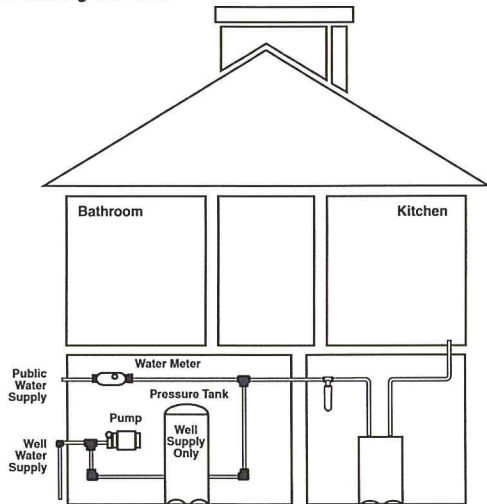

## Replacement Cartridge Options

Sediment Model	Load	Nominal Micron Rating	Application			Max. Flow Rate
			Sediment/Rust	Chlorine Taste & Odor	Scale	
AP431	N/A	N/A			•	10 gpm (37.9 lpm)

**WARNING:** Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

CUNO Incorporated recommends regularly scheduled maintenance and replacement of the filter cartridge(s) in order for the product to perform as advertised/sold. **Change the filter cartridge at least every 6 months. Improper installation and maintenance may result in property damage due to water leakage.**

## Limited Warranty:

CUNO Incorporated warrants that this product is free from defects in materials and workmanship. This limited warranty, together with any and all warranties implied by law, shall be limited to a period of one (1) year from the date of original purchase. This limited warranty does not apply to failures that result from abuse, misuse, alteration or damage not caused by CUNO or failure to properly comply with these installation or cartridge change-out instructions. This limited warranty is subject to exclusions and limitations. Please refer to the Warranty Card provided with the product for details.

Distributed by:



CUNO Incorporated  
400 Research Parkway  
Meriden, CT 06450 U.S.A.  
Toll Free: 1.800.222.7880  
Worldwide: 203.237.5541  
Fax: 203.238.8701

www.aquapure.com • www.cuno.com